


DATE SHEET-C P 9 V

Electrical characteristics

Type	CP9V
System	lithium/ manganese dioxide
Nominal capacity (mAh)	1200@1mA to 2.0V @23°C
Rated voltage (V)	9.0
Impedance at 1kHz (Ω)	7
Max. continuous current (mA)	400
Max. pulse current (mA)	800
Storage temperature	-20 ~+40 °C
Operation temperature range	-20°C~+60°C
Weight (g)	33.0
Specific energy	360Wh/Kg
Energy density	480Wh/L
Anode tap/cathode tap	as drawing
Self Discharge Rate	Under 2% for years@30°C
Jacket	ABS
Max. dimensions (mm)	17.5×26.5×48.8

Any special or specific for shape, thickness or discharge rate, please consult GMB.

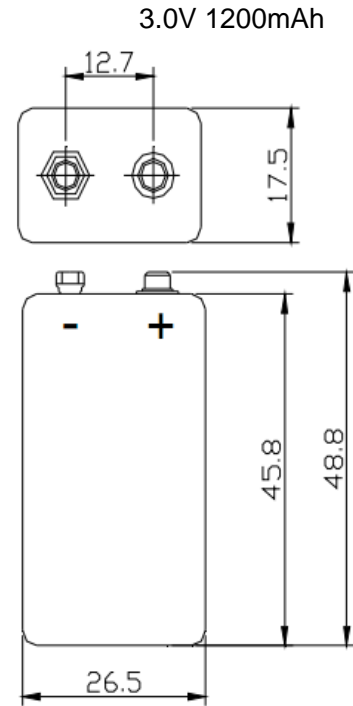

Key Features

- High single cell voltage
- Light weight
- Small Size
- High security
- Stable operating voltage
- Wide Operating temperature range
- Low Self-discharge rate
- Flexible on shape design
- Restricted for UL、UN38.3 and ROHS
- UL file: MH45782

Guangzhou Markyn Battery Co., Ltd.

Block 2, haijing Road 06, Markyns industrial Zone, Xinzao Town, Panyu District, Guangzhou, P.R.C..


Tel: (86)20 — 34729558 Fax:(86)20 — 3476 5531

Email:sales@gmbattery.com




Discharge Curve
Constant Current

DATE SHEET- CP9V
3.0V1200mAh

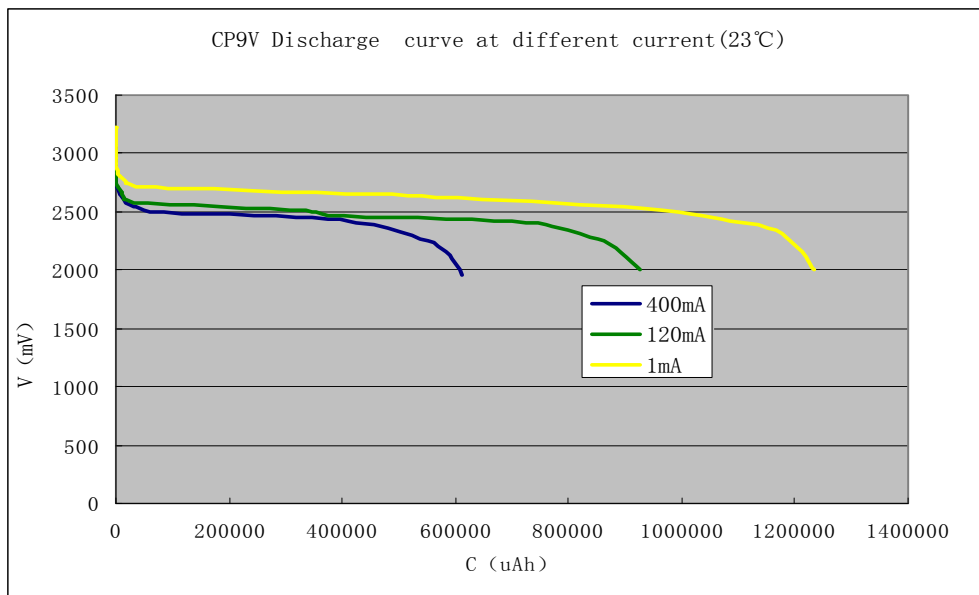

Capacity VS Temperature

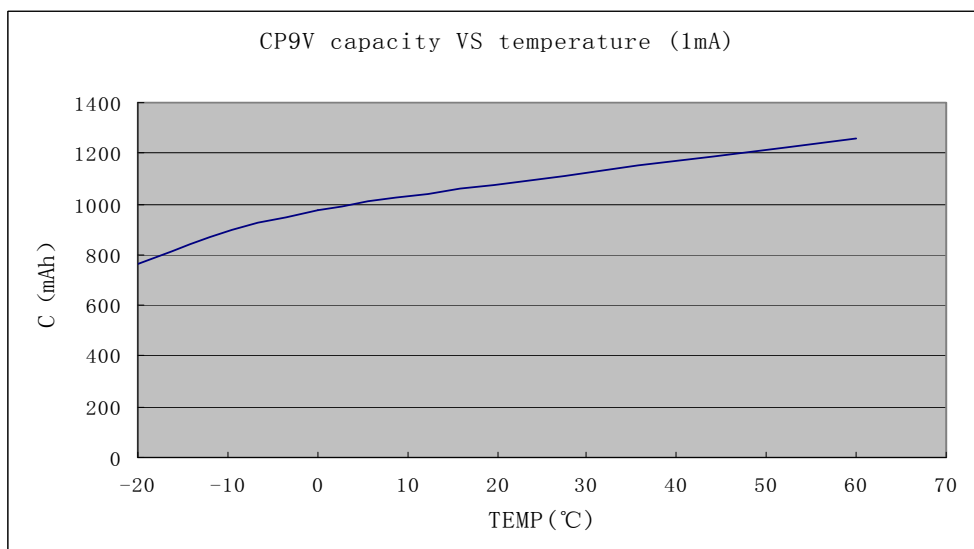

Guangzhou Markyn Battery Co., Ltd.
Block 2, haijing Road 06, Markyns industrial Zone, Xinzao Town,
Panyu District, Guangzhou, P.R.C..
Tel: (86)20 — 34729558 Fax:(86)20 — 3476 5531
Email:sales@gmbattery.com

