


# 2ER26500

**SPECIFICATION: (23±2°C)**

Nominal capacity (3mA~2V)	8.0Ah
Rated voltage:	7.2 V
Max constant current of discharge:	130mA
Max discharge current(pulse):	400mA
Weight:	112 g
Operating temperature range:	-55~85°C

**Discharge characteristics at 23±2°C**

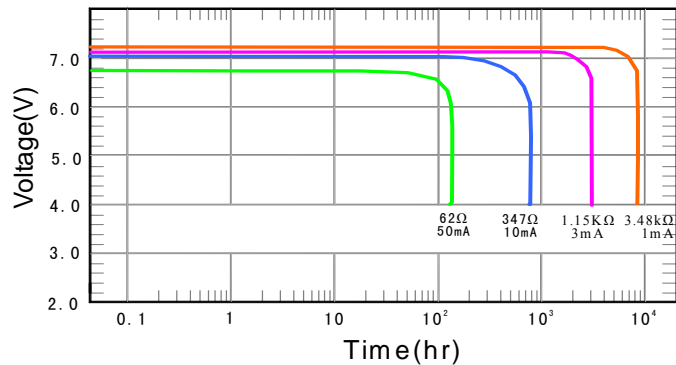

S: Standard termination

**Notes:**


Dimension: mm  
Special terminations can be made as requested.

T: Solder tabs  
P: Axial pins


**Important Notes**

Do not short or charge the battery.  
Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.  
Do not heat/use the battery beyond the permitted temperature range.

**Capacity VS. Current**

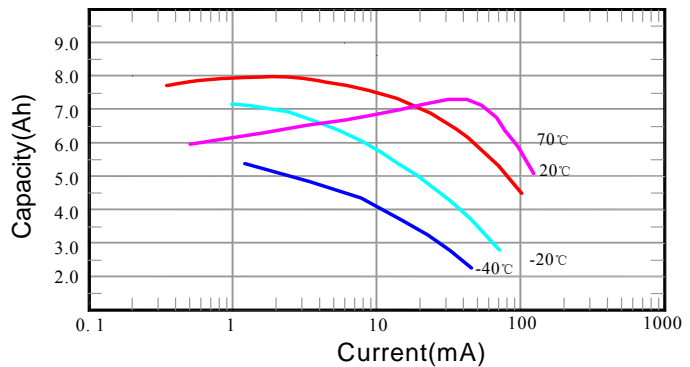

**Voltage VS. Temperature**

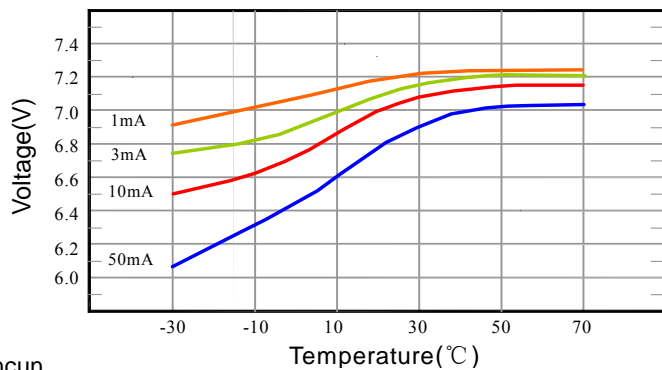

Guangzhou Markyn Battery Co., Ltd.

YiJia Industrial Park, Shixin Road 1100, Nancun Town, Panyu District, Guangzhou P.R.C

Tel:(86)20 — 8456 0852 Fax:(86)20 — 3476 7936

Email:sale s@gmbattery.com

 U.L. Component Recognition MH 45782