


## ER 18505M

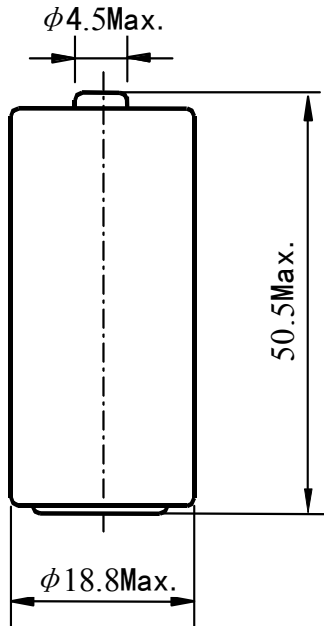

S: Standard termination

**Notes:**

- Dimension: mm
- Special terminations can be made as requested.
- T: Solder tabs
- P: Axial pins


**Important Notes**

- Do not short or charge the battery.
- Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.
- Do not heat/use the battery beyond the permitted temperature range.


**SPECIFICATION: (23±2°C)**

|                                    |          |
|------------------------------------|----------|
| Nominal capacity (10mA~2V):        | 3.2Ah    |
| Rated voltage:                     | 3.6V     |
| Max constant current of discharge: | 1000mA   |
| Max discharge current(pulse):      | 2000mA   |
| Weight:                            | 30g      |
| Operating temperature range:       | -55~85°C |


**Discharge characteristics at 23±2°C**

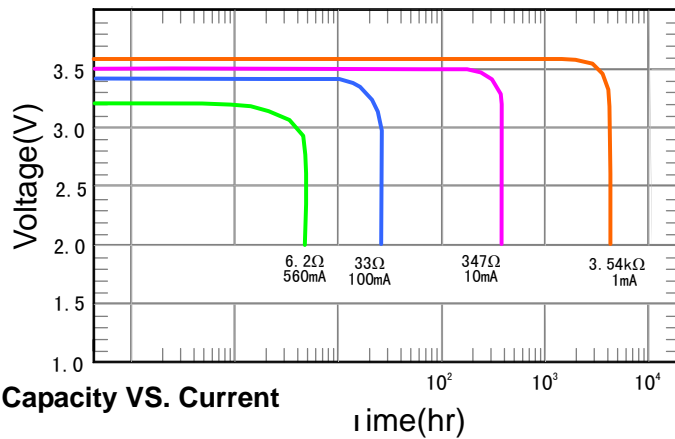

Capacity VS. Current

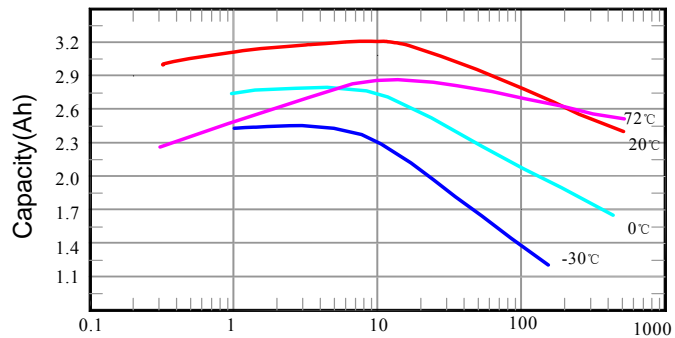

Voltage VS. Temperature

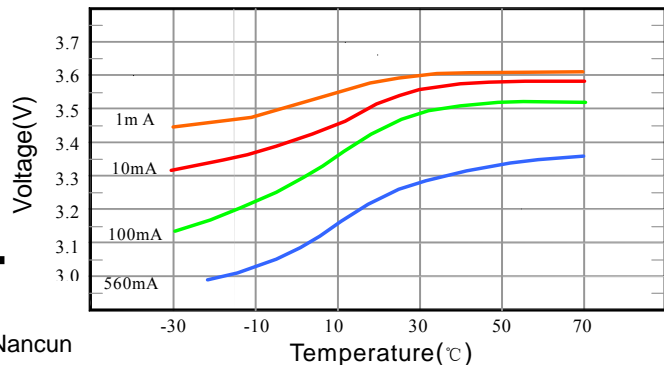

Guangzhou Markyn Battery Co., Ltd.

YiJia Industrial Park , Shixin Road 1100 ,Nancun Town,Panyu District, Guangzhou P.R.C

Tel:(86)20 — 8456 0852Fax:(86)20 — 3476 7936

Email:sales@gmbattery.com