


Electrical characteristics

Type	CP203045
System	lithium/ manganese dioxide
Nominal capacity (mAh)	400@1mA to 2V @23°C
Rated voltage (V)	3.0
Impedence at 1kHz (Ω)	5
Max. Continuous current (mA)	100
Max. pulse current (mA)	200
Storage temperature	-20 ~+40 °C
Operation temperature range	-20°C ~+60°C
Weight (g)	4.5
Specific energy	270Wh/Kg
Energy density	440Wh/L
Anode tape/cathode tape	Aluminum/Nickel
Self Discharge Rate	Under 2% for years@30°C
Jacket	Flexible Aluminum Foil Packaging
Max. dimensions (mm)	2.2×30.5×46

Any special or specific for shape, thickness or discharge rate, please consult GMB.

DATE SHEET-C P 203045

3.0V 400mAh

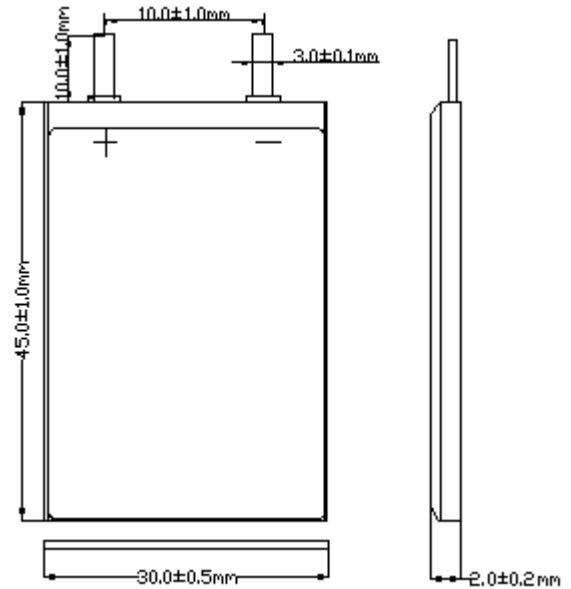

Key Features

- High Energy Density
- High single cell voltage
- Light weight
- Small Size
- High security
- Stable operating voltage
- Wide Operating temperature range
- Low Self-discharge rate
- Flexible on shape design
- Restricted for UL、UN38.3 and ROHS
- UL file: MH45782

Guangzhou Markyn Battery Co., Ltd.

Block 2, haijing Road 06, Markyns industrial Zone, Xinzao Town, Panyu District, Guangzhou, P.R.C..

Tel: (86)20 — 34729558 Fax:(86)20 — 3476 5531

Email:sales@gmbattery.com




Discharge Curve


DATE SHEET- CP203045

Constant Current

3.0V400mAh

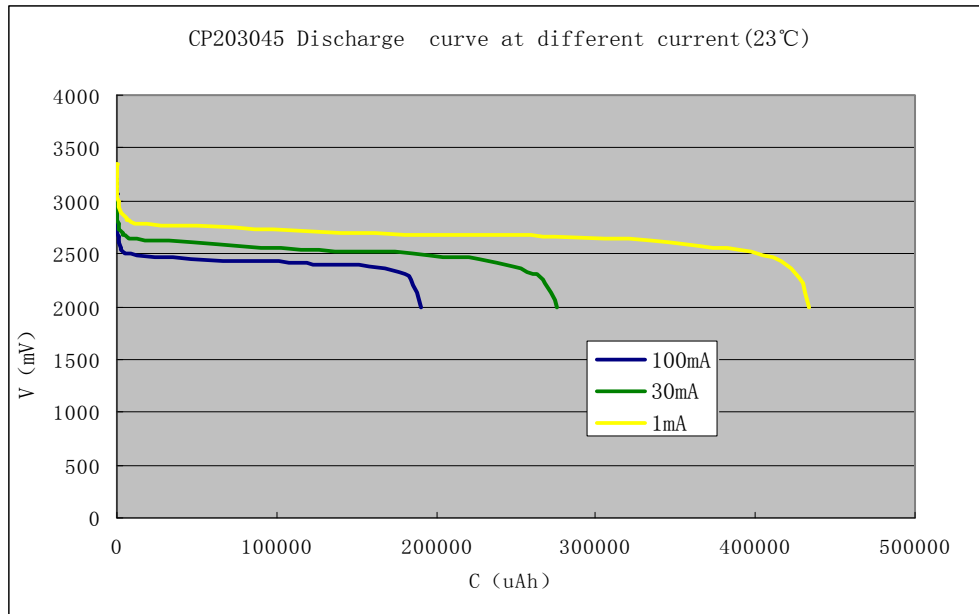

Capacity VS Temperature

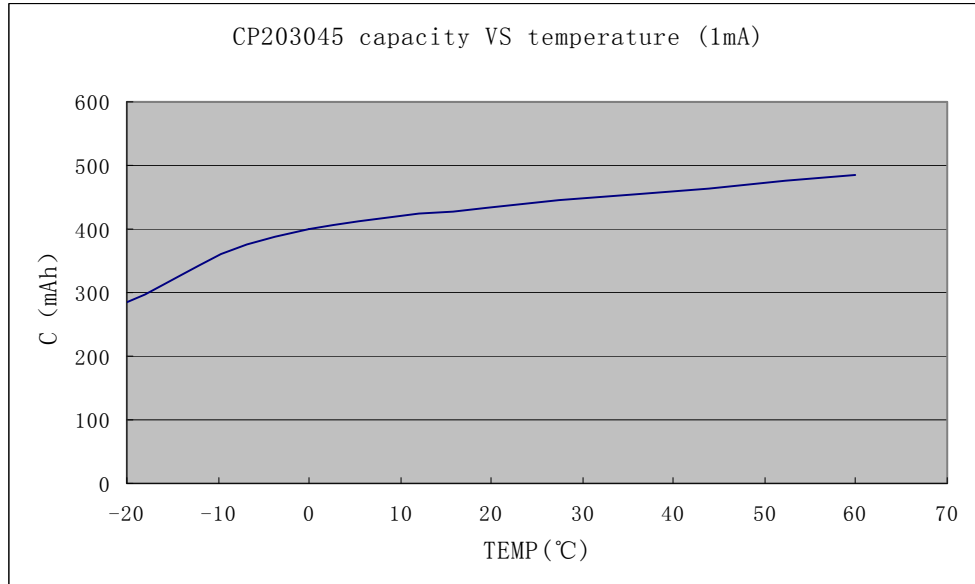

Guangzhou Markyn Battery Co., Ltd.

Block 2, haijing Road 06, Markyns industrial Zone, Xinzao Town,
Panyu District, Guangzhou, P.R.C..

Tel: (86)20 — 34729558 Fax:(86)20 — 3476 5531

Email:sales@gmbattery.com

