


## ER 14250H

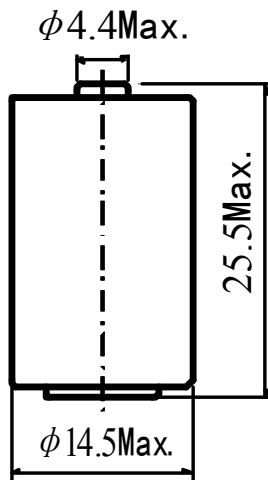

S: Standard termination

### Notes:

Dimension: mm

Special terminations can be made as requested.

T: Solder tabs

P: Axial pins

### Important Notes

Do not short or charge the battery.


Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.

Do not heat/use the battery beyond the permitted temperature range.


### SPECIFICATION: ( $23\pm 2^\circ\text{C}$ )

|                                    |                            |
|------------------------------------|----------------------------|
| Nominal capacity (0.5mA~2V):       | 1.2AH                      |
| Rated voltage:                     | 3.6 V                      |
| Max constant current of discharge: | 4 0mA                      |
| Max discharge current(pulse):      | 80mA                       |
| Weight:                            | 11g                        |
| Operating temperature range:       | $-55\sim 85^\circ\text{C}$ |


### Discharge characteristics at $23\pm 2^\circ\text{C}$

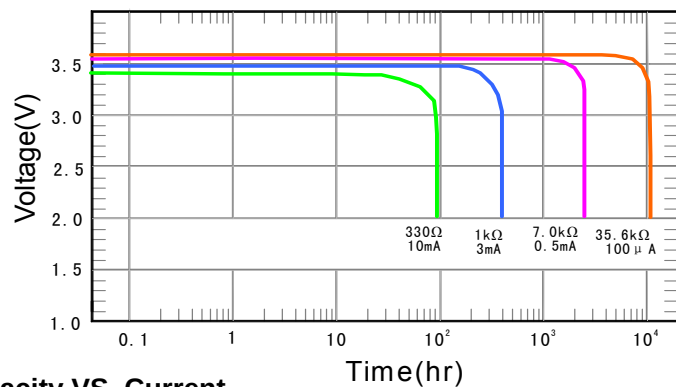

### Capacity VS. Current

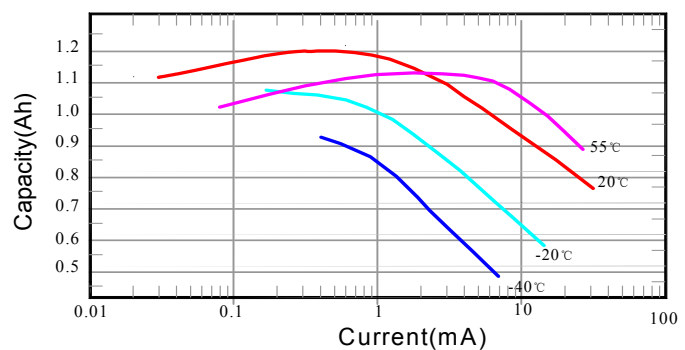

### Voltage VS. Temperature

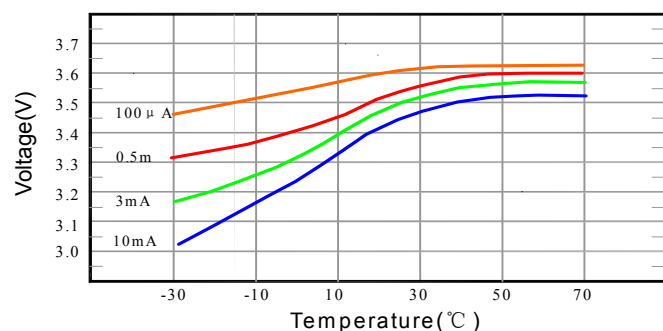

Guangzhou Markyn Battery Co., Ltd.

Block 2, haijing Road 06, Markyns industrial Zone,  
Xinzao Town, Panyu District, Guangzhou, P.R.C..

Tel:(86)20 — 34729558 Fax:(86)20 — 34725531

Email:sales@gmbattery.com

 U.L. Component Recognition MH 45782