



CR34615SE 3.0V 14000mAh

Lithium-manganese dioxide
cylindrical batteries

Cell size references : D

Electrical characteristics

(Stored for one year or less)

⊗ **N**ormal capacity **14 000mAh**
(At 2mA, +25°C, 2.0V cut off)

⊗ **R**ated voltage **3.0V**

⊗ **M**ax. recommended continuous current **80mA**
Current value is determined to be the level at which the nominal capacity is obtained with an end voltage of 2.0V at +25°C

⊗ **M**ax. Pulse current **200mA**
Current value is obtained at 2.0V cell voltage when pulse is applied for 1.5 seconds at 50% discharge depth at 25°C

⊗ **S**torage (recommended max. temperature) **23°C**

⊗ **O**perating temperature range **-40°C ~ +85°C**

⊗ **W**eight (approx) **135g**

WARNING:

Fire, explosion and severe burn hazard. Do not recharge, crush, disassemble, heat above 100°C, incinerate or expose contents to water.

Key features

- High and stable operating voltage
- Low self-discharge rate
Less than 1% after 1 year of storage at +20°C
- Stainless steel container
- Hermetic glass-to-metal sealing
- Non-flammable electrolyte
- Compliant with IEC86-4 safety standard
- Non-restricted for transport


UL Component Recognition
File Number MH 45782

Main applications

- TPMS
- Alarms and security system
- Memory back-up
- Tracking system
- Automotive electronics
- Professional electronics
- Computer real-time clocks

.....

LITHIUM BATTERIES

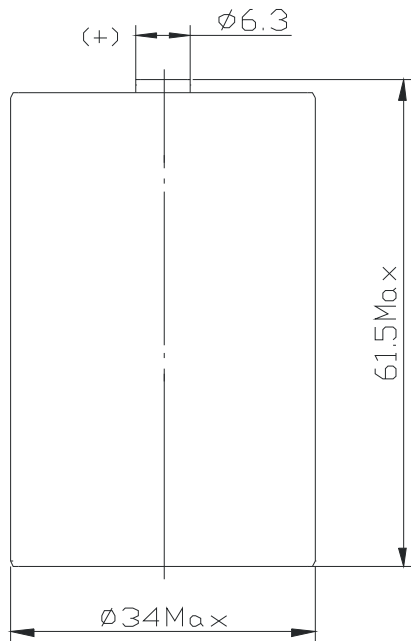

CR34615SE

Lithium-manganese dioxide
cylindrical batteries

Dimensions in mm

Available Terminations	
-/P	Axial Pin
-/T /PT2	Radial Pin
-/PT /TP	Polarized Tab

Typical discharge profiles at 25°C

