


DATE SHEET-CP105050

3.0V 220mAh

Electrical characteristics

Type	CP105050
System	lithium/ manganese dioxide
Nominal capacity (mAh)	220@1mA to 2V @23°C
Rated voltage (V)	3.0
Impedence at 1kHz (Ω)	5
Max. continuous current (mA)	50
Max. pulse current (mA)	80/10ms
Storage temperature	-20 ~+40 °C
Operation temperature range	-20°C ~+60°C
Weight (g)	3.5
Specific energy	170Wh/Kg
Energy density	240Wh/L
Anode tape/cathode tape	Aluminum/Nickel
Self Discharge Rate	Under 2% for years@30°C
Jacket	Flexible Aluminum Foil Packaging

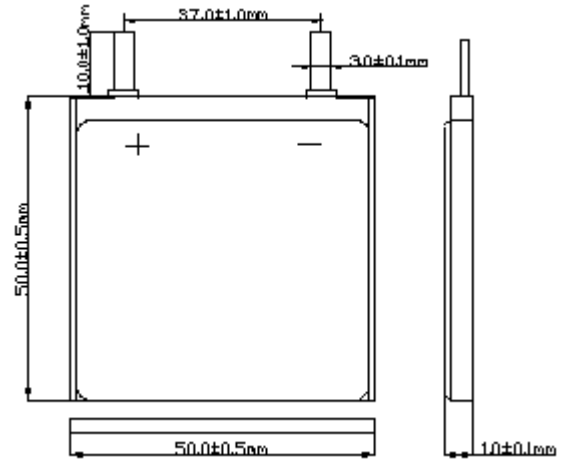

Key Features

- High Energy Density
- High single cell voltage
- Light weight
- Small Size
- High security
- Stable operating voltage
- Wide Operating temperature range
- Low Self-discharge rate
- Flexible on shape design
- Restricted for UL、UN38.3 and ROHS
- UL file: MH45782

Max. dimensions (mm) **1.1** × 50.5 × 51

Any special or specific for shape, thickness or discharge rate, please consult GMB.

Guangzhou Markyn Battery Co., Ltd.

ADD: Block2, Haijin Road6, Markyns Industrial Zone, XinZao TownPanyu District Guangzhou City, PRC

Tel:(86)20 — 3472 9558

Fax:(86)20 — 3472 5531

Email:sales@gmbattery.com




Discharge Curve


DATE SHEET- CP105050

Constant Current

3.0V 220mAh

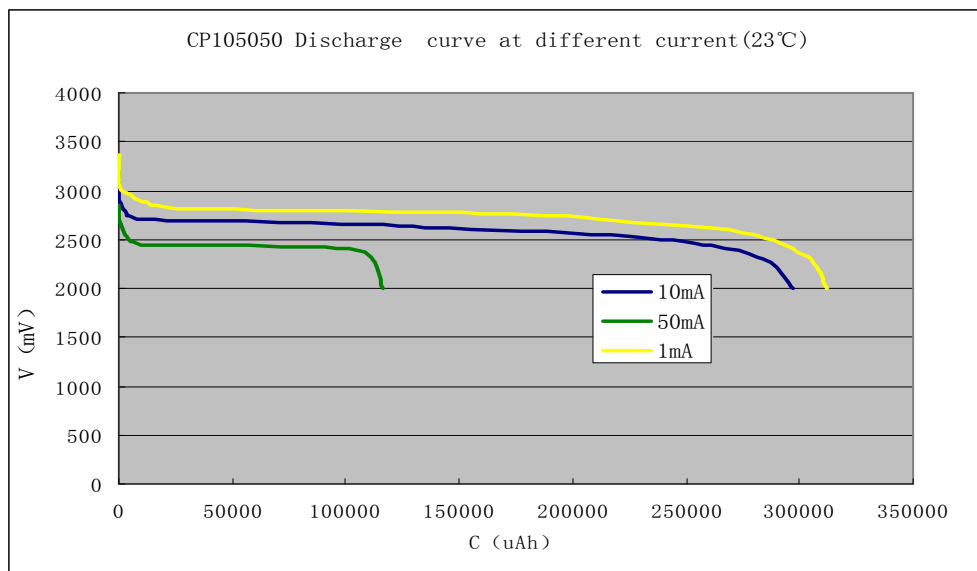

Capacity VS Temperature

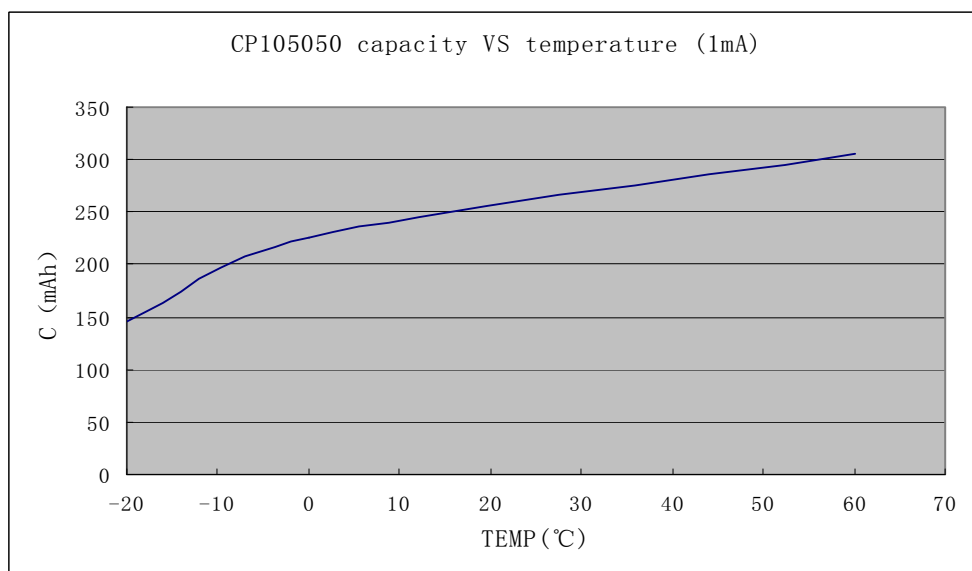

Guangzhou Markyn Battery Co., Ltd.

ADD: Block2, Haijin Road6, Markyns Industrial Zone, XinZao

TownPanyu District Guangzhou City, PRC

Tel:(86)20 — 3472 9558

Fax:(86)20 — 3472 5531

Email:sales@gmbattery.com

