



ER341245H

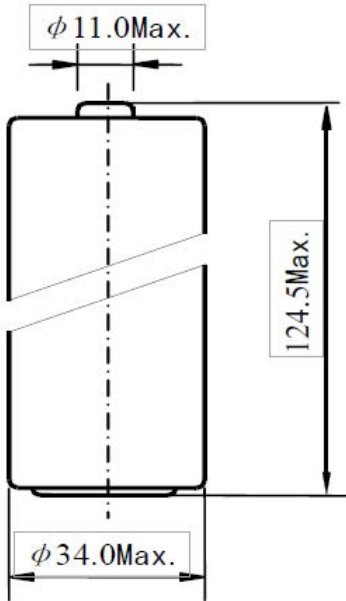

SPECIFICATION: (23±2°C)

Nominal capacity (2mA~2V):	3.5 Ah
Rated voltage:	3.6V
Max constant current of discharge:	420mA
Max discharge current(pulse):	500mA
Weight:	200g
Operating temperature range:	-55~85°C

Discharge characteristics at 23±2°C

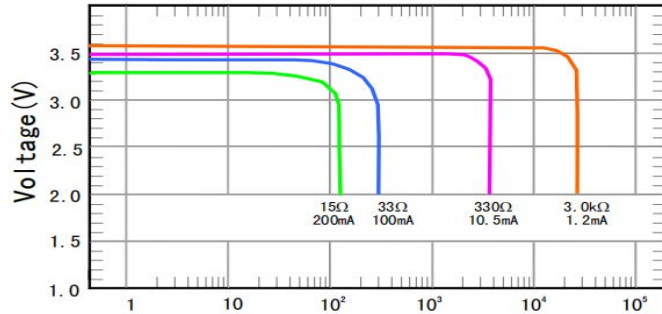

S: Standard termination


Notes:

- Dimension: mm
- Special terminations can be made as requested.
- T: Solder tabs
- P: Axial pins


Important Notes

- Do not short or charge the battery.
- Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.
- Do not heat/use the battery beyond the permitted temperature range.

Capacity VS. Current

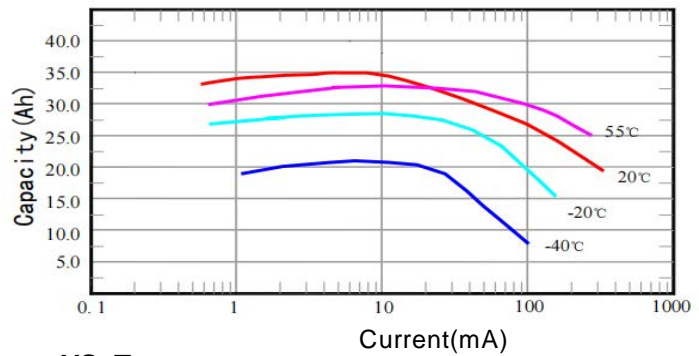

Voltage VS. Temperature

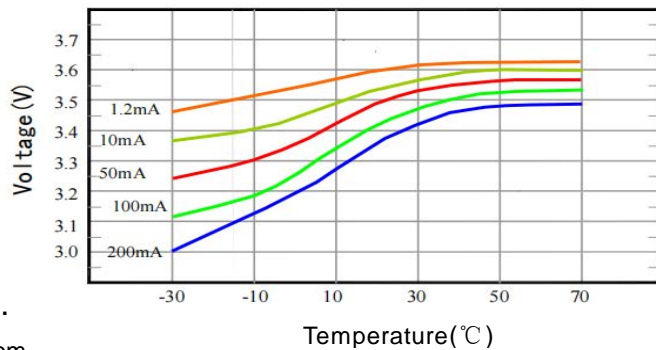

Huizhou Markyn New Energy Co., Ltd.
 Tel:(86)20 — 3992 7051 Email:info@gmbattery.com
 www.gmbattery.com

UL U.L. Component Recognition MH 45782