



ER 10250

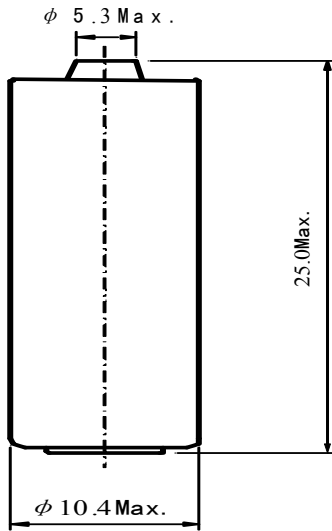

SPECIFICATION: (23±2°C)

Nominal capacity (0.5mA~2V):	0.40Ah
Rated voltage:	3.6 V
Max constant current of discharge:	5mA
Max discharge current(pulse):	10mA
Weight:	4g
Operating temperature range:	-55~85°C

Discharge characteristics at 23±2°C

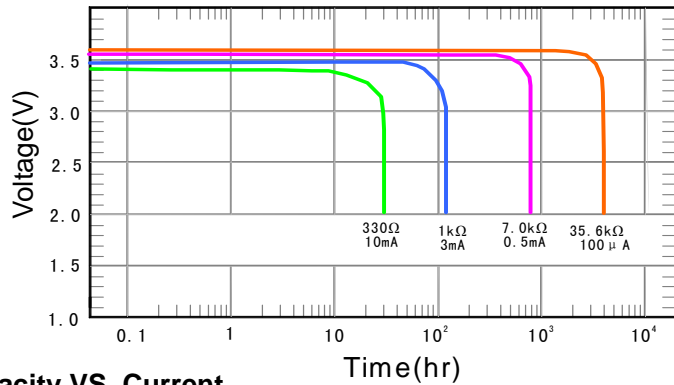

S: Standard termination

Notes:

Dimension: mm

Special terminations can be made as requested.

T: Solder tabs

P: Axial pins


Important Notes

Do not short or charge the battery.


Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.

Do not heat/use the battery beyond the permitted temperature range.

Capacity VS. Current

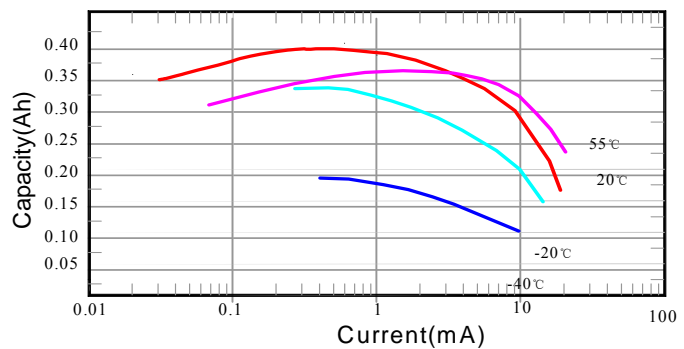

Voltage VS. Temperature

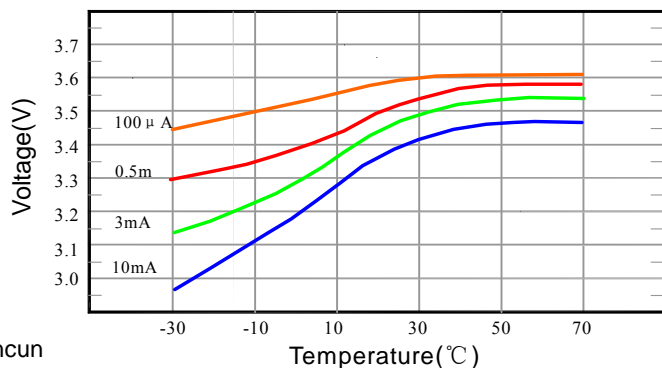

Guangzhou Markyn Battery Co., Ltd.

YiJia Industrial Park, Shixin Road 1100, Nancun

Town, Panyu District, Guangzhou P.R.C

Tel: (86)20 — 8456 0852 Fax: (86)20 — 3476 7936

Email: sales@gmbattery.com