


ER 17505M


SPECIFICATION: (23±2°C)

| | |
|------------------------------------|----------|
| Nominal capacity (10mA~2V): | 2.8Ah |
| Rated voltage: | 3.6V |
| Max constant current of discharge: | 600mA |
| Max discharge current(pulse): | 1200mA |
| Weight: | 28g |
| Operating temperature range: | -55~85°C |


Discharge characteristics at 23±2°C

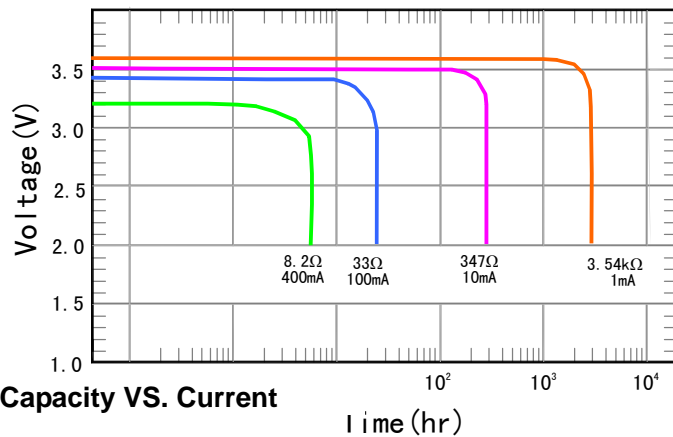

Capacity VS. Current

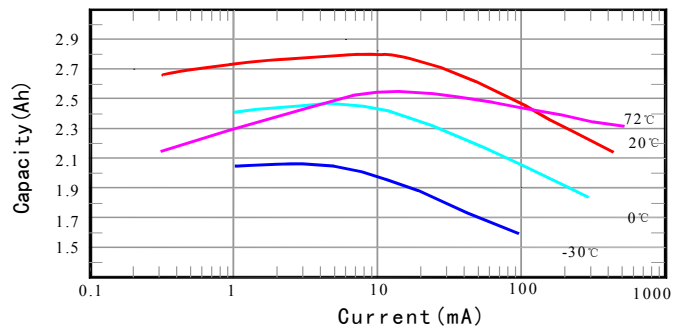

Voltage VS. Temperature

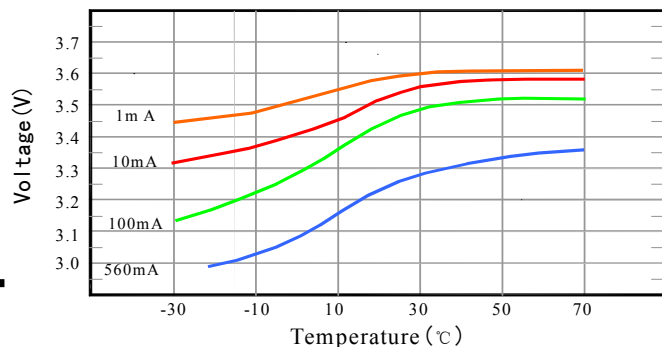

S: Standard termination

Notes:

- Dimension: mm
- Special terminations can be made as requested.
- T: Solder tabs
- P: Axial pins

Important Notes

- Do not short or charge the battery.
- Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.
- Do not heat/use the battery beyond the permitted temperature range.



Guangzhou Markyn Battery Co., Ltd.

YiJia Industrial Park , Shixin Road 1100 ,Nancun Town,Panyu District, Guangzhou P.R.C

Tel:(86)20 — 8456 0852 Fax:(86)20 — 3476 7936

Email:sales@gmbattery.com

U.L. Component Recognition MH 45782